

S Series Control Actuators 70 in.lb 8Nm

Specification & Installation instructions




Feature:

- Mounts easy on round & square shaft (with option -8).
- External clutch for manual adjustments .
- Maintenance free.
- Position indicator.
- Failsafe by *Enerdrive System*¹ (on model 60, 65 & 80).
- Auxiliary switches (on model 20 & 80).

ST000S
STO0SS
ST020S
ST060S
ST065S
STOBOS
STBOOS
STBOSS
ST820S
ST860S
ST865S
STB80S

Technical Data	STO00S	STO0SS	ST020S	ST060S	ST065S	STOBOS	STBOOS	STBOSS	ST820S	ST860S	ST865S	ST880S
Auxiliary switches	No	No	Yes (2)	No	No	Yes (2)	No	No	Yes (2)	No	No	Yes (2)
Feedback	No	Yes	No	No	Yes	No	No	Yes	No	No	Yes	No
Fail safe - <i>Enerdrive</i>	No			Yes			No			Yes		
Power consumption	8 VA			20VA Crete, 8VA			6 watts			15 watts initial charging, 6 watts normal operation		
Control signal	3 wire / 2 position, 3 wire / 3 position floatina			2 wire / 2 position, 4 wire / 3 position floatina			3 wire / 2 position, 3 wire / 3 position floatina			2 wire / 2 position, 4 wire / 3 position floatina		
Power supply	22 to 26 VAC or 28 to 32 VDC						40 to 56 VDC					
Running time through 90°	90 - 110 sec. (Fail-safe 20-35 sec)											
Torque	70 in.lb. {8 Nm} at rated voltage											
Electrical connection	18 AWG [0.8 mm ²] minimum											
Inlet bushing	2 inlet bushing of 5/8 in [15.9 mm] & 7/8 in [22.2 mm]											
Angle of rotation	0 to 90 degrees, mechanically adjustable (factory set with 90° stroke)											
Direction of rotation	Reversible, Clockwise (CW) or Counterclockwise (CCW) (factory set with CW direction)											
Ambient temperature	-22°F to +122°F [-30°C to +50°C]											
Storage temperature	-22°F to +122°F [-30°C to +50°C]											
Relative Humidity	5 to 95 % non condensing.											
Ingress protection	IP22 equivalent to Nema type 2, IP54 equivalent to Nema type 3R if water tight inlet bushings (not supplied NEP617) are installed											
Weight	3 lbs. [1.4 kg]											
Warning: Do not press the clutch when actuator is powered												

Dimensions

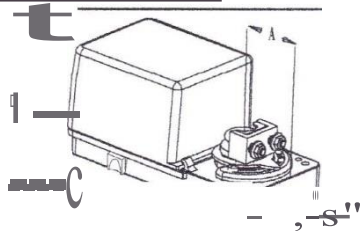

Dimension	Inches	Metric (mm)
A	1.50	38.1
B	3.26	82.8
C	6.60	167.5
D	3.01	76.4

Caution

We strongly recommend that all neptronic® products be wired to a separate transformer and that transformer shall service only neptronic® products. This precaution will prevent interference with, and/or possible damage to incompatible equipment. When multiple actuators are wired on a single transformer, current must be observed. Low voltage runs create voltage drop which may affect the actuator performance.

¹ Enerdrive System U.S.A. Patent #5,278,454



Mechanical installation

1. Manually close the damper blades and positioned the actuator at 0° or 90°.
2. Slide the actuator onto the shaft.
3. Tighten the nuts on the "U" bolt to the shaft with a 8mm wrench to a torque of 60 in. lb. [6,7 Nm].
4. Slide the mounting bracket under the actuator. Ensure free movement of the slot at the base of the actuator. The bracket pin must be placed in the mid distance of the slot.
5. Fix the bracket to the ductwork with #8 self-tapping screws.

Wiring Diagrams

<p>Models 8T0008, 0058, 0208, BOOS, 8055 & 8208</p> <p>3 wire / 2 position (ON-OFF)</p>	<p>Models ST0608, 0658, OBOS, 8608, 8658 & 8808</p> <p>2 wire / 2 position (ON-OFF)</p>
<p>3 wire / 3 point floating</p>	<p>4 wire / 3 point floating</p>

PC Board

Dip switch settings

Rotation direction (SW1)

CW $n=n=i$ (0 to 90°) $rr==r=ill$ CCW (9Q to Q⁰)

Fail safe direction (SW2)

Fail safe $||TTT|$ return at 0° $rr==r=ill$ Fail safe return at 90°

Stroke adjustment

To adjust the stroke, move the adjustment screws at the desired position.