

CT1000 – Gas Sensor/Controller
CT2100 – Dual Channel Gas Sensor/Controller



Simple - Rugged - Economical

AirTest offers two versatile platforms for the control of gases or refrigerants. These controller products can be configured to provide a single control and sensing package using any of AirTest’s TR1000 solid-state sensor platforms. Alternatively, the controllers can be configured to work with any of AirTest’s remote gas sensing transmitters (TR2000, TR3200, TR5200, TR5500).


CT1000 - Controller

CT2100 - Controller

- ✓ Integrated sensor/controller that can provide direct actuation of fans or alarms when combined with any of AirTest’s TR1000 gas transmitters. Also can be used with any of AirTest’s remote gas transmitters.
- ✓ Includes two 5A relays with adjustable set points and time delays.
- ✓ Power options for 24 VAC, 120 VAC or 220 VAC.
- ✓ LED indication of Power On, Low Alarm, High Alarm.
- ✓ Multiple controllers can be daisy chained to provide multiple sensor zone control.
- ✓ Easily field calibrated.
- ✓ Rugged metal enclosure.
- ✓ CSA Listed (UL Equivalent)

- ✓ Provides integrated dual sensing capability for control of fans or alarms when combined with any of AirTest’s TR1000 gas transmitters. Also can be used with any of AirTest’s remote gas transmitters.
- ✓ Includes two sets of 10A relays for activation/alarm and fault detection relay.
- ✓ Power options for 24 VAC, 120 VAC or 220 VAC
- ✓ LED Indication of Power On, Fault Detection and 2 threshold Indicators for each gas channel.
- ✓ Multiple controllers can be daisy chained to provide multiple sensor zone control.
- ✓ Easily field calibrated.
- ✓ Rugged metal enclosure.
- ✓ CSA Listed (UL Equivalent)

CT1000 Controller Dimensions

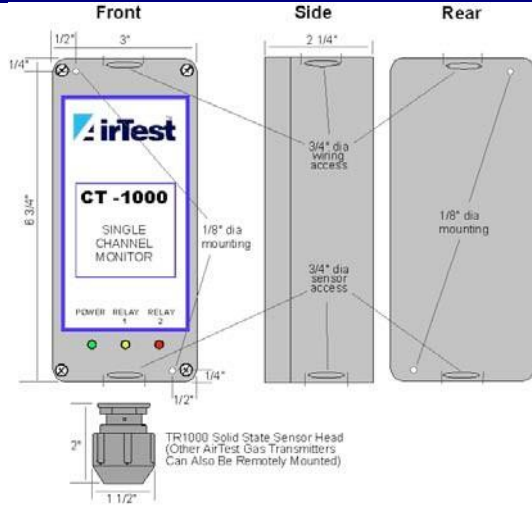

Specifications


General

Sensor Type: Integrated Solid State/Remote Transmitter
Sampling Method: Diffusion
Approval: CSA/NRTL (UL Equivalent)
Enclosure Rating: NEMA 4X
Power Input: Specify 24 VAC, 120VAC, 220 VAC
Temp Operating Conditions: -4 to 122° F (-20 to 50°C),
Humidity Operating Conditions: 0 to 90% RH
Storage Conditions: -40 to 158°F (-40 to 70°C)

Other Parameters (A)

| Parameter | CT1000 | CT2100 |
|---------------------|--------------------------------------|--------------------------|
| Power Requirement | 2.5 VA | 12 VA |
| Low Level Relay | 1 - 5A (250 VAC) | 2 - 10A |
| High Level Relay | 1 - 5A (250 VAC) | 2 - 10A |
| Fault Level Relay | NA | 1 - 10A |
| Relay Trip Point | Trim Pot Adjustment | Trim Pot Adjustment |
| Relay Time Delay | up to 16 settings @1.2 min intervals | Variety Of On/Off Delays |
| Sound On Relay Trip | NA | User Adjustable |
| Weight | 22 oz/625 grams | 6 lbs/2.7 kg |
| Material | Enameled Steel | Cast Aluminum |

CT2100 Controller Dimensions

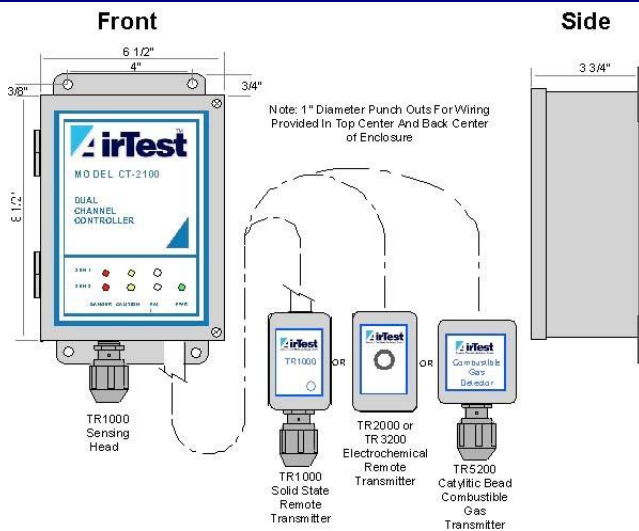

Integrated Sensor Head (B)

| TR1000 Solid State Head/Transmitter | | | | |
|-------------------------------------|--------|-------------|-----------------|------------------|
| Gas | Model | Range (ppm) | Low Trip* (ppm) | High Trip* (ppm) |
| CO | SS-CO | 0-400 | 35 | 100 |
| Combustibles** | SS-CB | 0-40% LEL | 10% LEL | 20% LEL |
| R22 | SS-832 | 0-3000 | 250 | 1000 |
| R134 | SS-832 | 0-3000 | 250 | 1000 |
| Ammonia (NH3) | SS826 | 0-500 | 50 | 250 |

* Different trip points can be set on request
 **Specify hydrocarbon to be measured

Remote Transmitters (C)



| TR2000* | TR3210* | TR5200* | TR5500* |
|------------------------------|---|---|---|
| Electrochemical | Electrochemical | Catalytic Bead* | Catalytic Bead* |
| Carbon Monoxide 0-200 ppm | Ammonia 0-50 ppm Hydrogen 0-10,000 ppm Hydrogen Sulfide 0-200 ppm Nitrogen Dioxide 0-10 ppm Oxygen 0-25% | Propane 0-100% LEL Butane 0-100% LEL Natural Gas 0-100% LEL Hydrogen 0-100%LEL | Propane 0-100% LEL Butane 0-100% LEL Natural Gas 0-100% LEL Hydrogen 0-100%LEL |

* Separate AirTest Data Sheet Available

Ordering Guide

CTXXXX-ST-PS-MN

| Controller Type | Sensor Type | Power Supply | Sensor Model No |
|-----------------|--|--------------------|----------------------|
| CT1000 | SS=Solid State | 24 VAC | Head from Table B* |
| CT2100 | E=Electrochemical CB=Catalytic Bead | 110 VAC 220 VAC | Remote From table C* |

*see R side of specs

Distributed By:

AirTest™ Technologies Inc. specializes in the application of cost effective, state-of-the-art gas monitoring technology to ensure the comfort, security, health and energy efficiency of buildings.



Specifications Subject to Change Without Notice

11/22/10



ph: 206 403 1989 toll free: 1 888 385 2110 fax: 206 282 4888
 E-mail: info@hvacep.com web: www.hvacep.com